

# *Loss of energy costs you!*

*Properly configured “**Dock Shelter Systems**”  
prevent energy loss in your factory...*




**GOXU**



## STANDARD DOCK SHELTER

*Easy, effective  
and  
“ideal” solutions*

**GOXU**  
— World Wide Open —

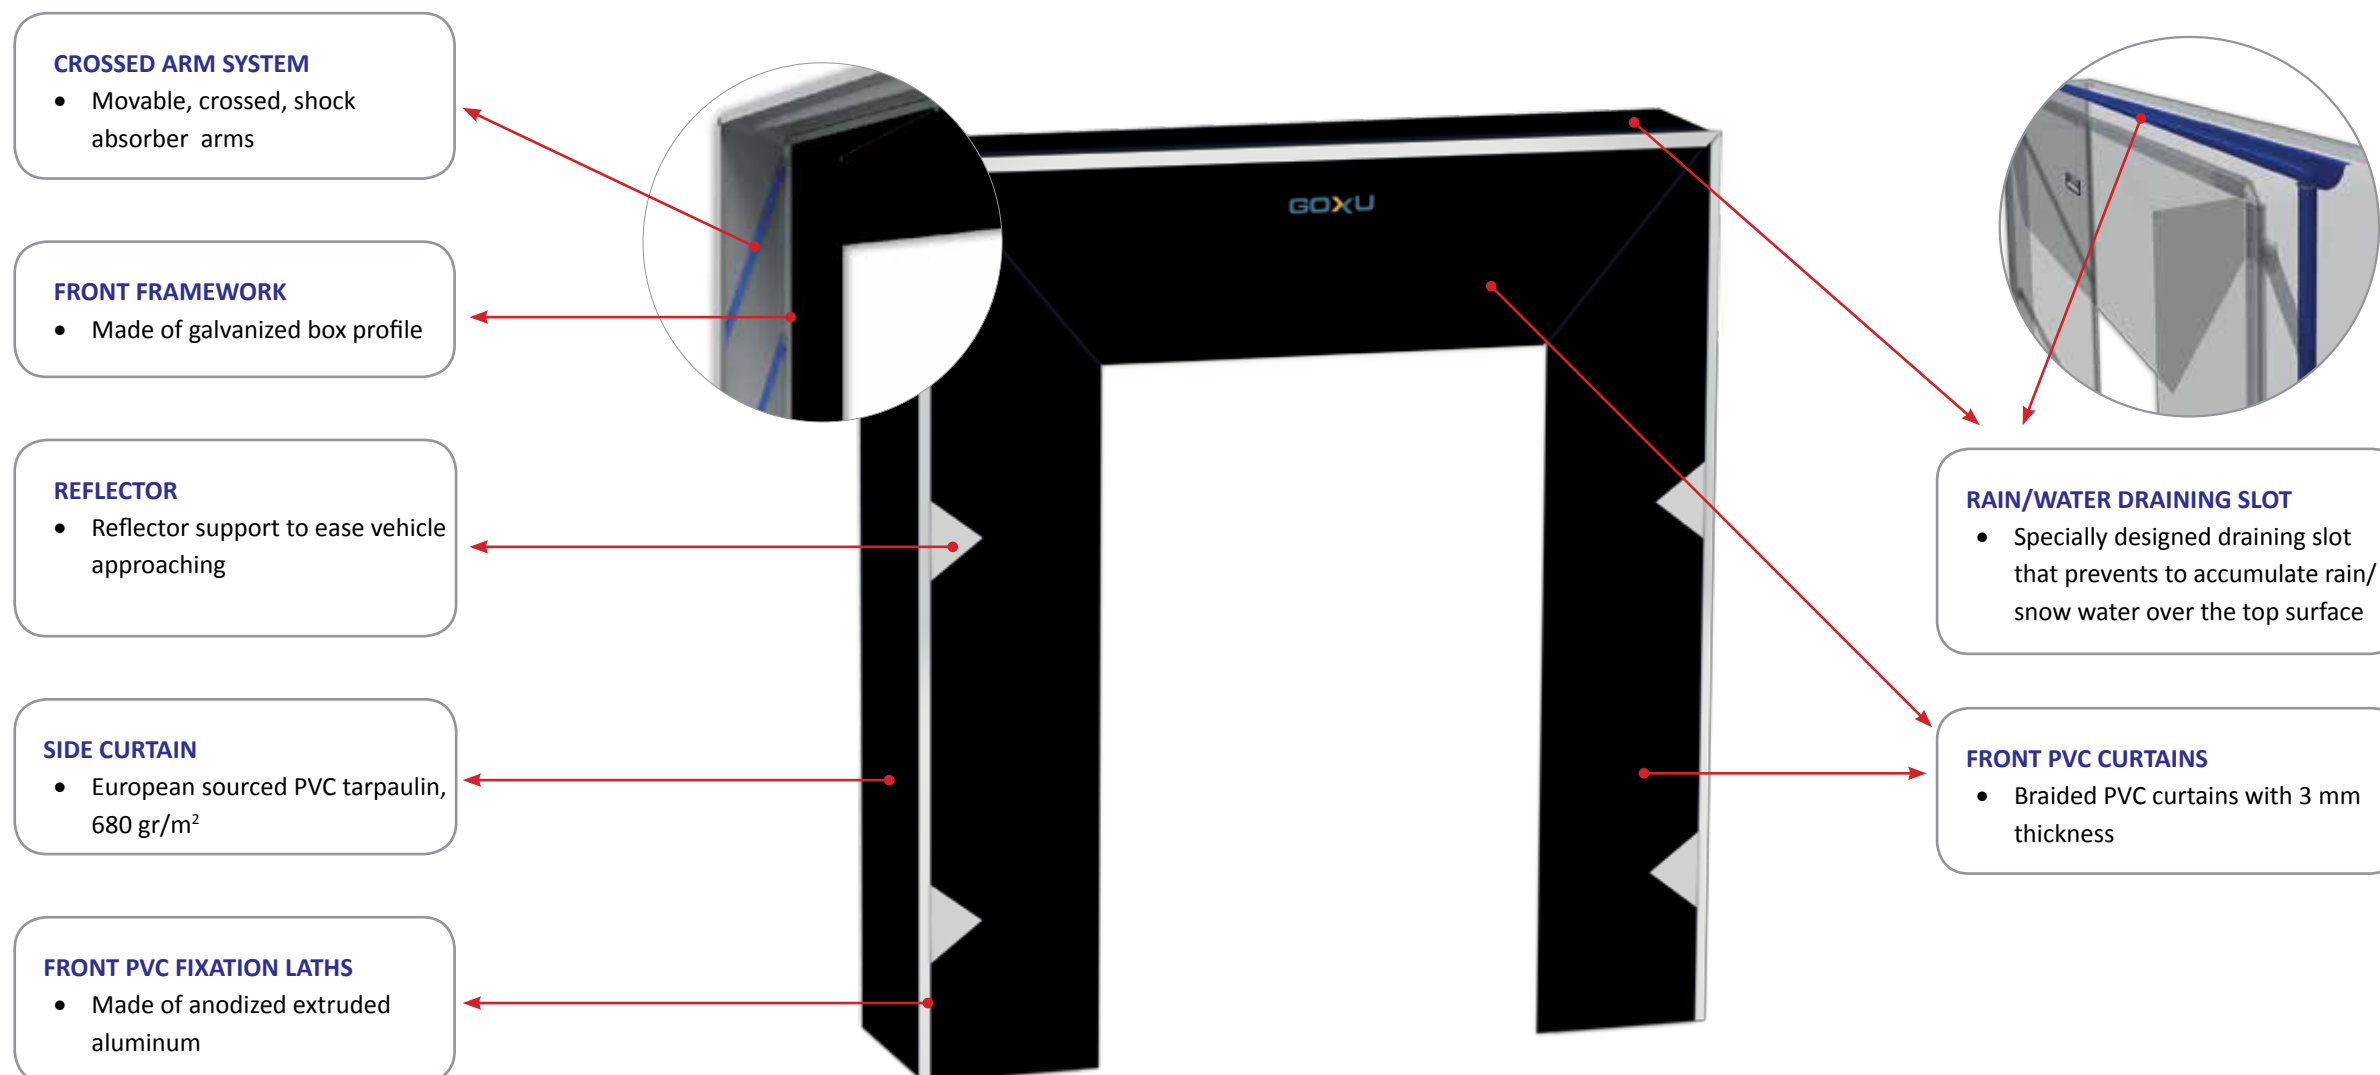

### Tarpaulin and PVC Curtain Colours

**STANDARD**- Black

\* Please refer to sales team for other colors

### Depth of Dock Shelter

- 700 mm Standard,
- 1000 mm Optional ✓

### Dimension Chart


		Height (mm)						
		3500	3750	4000	4250	4500	4750	5000
Width (mm)	3400	✓	✓	✓	✓	✓	✓	✓
	3600	✓	✓	✓	✓	✓	✓	✓
	3800	✓	✓	✓	✓	✓	✓	✓
	4000	✓	✓	✓	✓	✓	✓	✓
	4200	✓	✓	✓	✓	✓	✓	✓
	4400	✓	✓	✓	✓	✓	✓	✓
	4600	✓	✓	✓	✓	✓	✓	✓
	4800	✓	✓	✓	✓	✓	✓	✓
	5000	✓	✓	✓	✓	✓	✓	✓

**NOTE:** The most proper Dock Shelter size for standard vehicles is generally 3400 x 3500 mm. In different size requirements, the shelter may not wrap up the vehicle enough. In such cases, the gap between PVC curtains and vehicle may cause to light or heat transmission.



# INFLATABLE DOCK SHELTER

*Maximum  
“energy” saving*

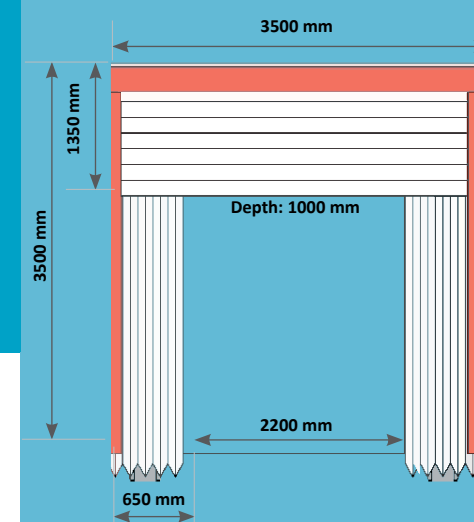

## FRONT AND SIDE CURTAINS

- Braided PVC curtains with 2 mm thickness

## SIDE FACADE

- PU filled facade panel with 40 mm thickness

## OTHER SPECIFICATIONS

**Coating:** DIN 5334 N/5cm 6000/5000

**Resistance to elongation:** 1000/900 DIN 53363

**Burning Class:** M2-B1 (DIN 75200, ISO 3795>100 mm/min.)

**Aero-elastic scale:** -40°C - +80°C

**Hygiene:** Anti-fugal and anti-bacterial

**Cleaning:** Dirt-proof and easy cleanup due to its LAK characteristics

## INFLATING TYPE

- With air pump

## DEFLATION TYPE

- With counter-weight system

## INFLATION/DEFLATION SPEED

- 8 sec./ 8 sec.

## REFLECTOR

- Reflector support to ease vehicle approaching

## FRONT PVC FIXATION LATHS

- Made of anodized extruded aluminum

## Tarpaulin and PVC Curtain Colours

**STANDARD-** Black

\* Please refer to sales team for other colors

## Dimension Chart

				TUNNEL DIMENSIONS		
MODELS		UPPER BLOKAGE	SIDE BLOKAGE	Width	Height	Depth
	TD 101	1350	650	3500	3500	1000
	TD 202	1350	650	3500	4000	1000
	TD 303	1350	650	3500	4500	1000
	TD 404	1750	650	3500	3500	1000
	TD 505	1750	650	3500	4000	1000
	TD 606	1750	650	3500	4500	1000

## DOCK HOUSE

*It's not yet  
too late...*



### ROOF

- PU filled facade panel or trapezium steel sheet
- Special design that prevents water accumulation

### SIDE AND FRONT FACADE

- PU filled facade panel or trapezium steel sheet

### DOCK SHELTER (Optional)

### DOCK LEVELER (Optional)

### FRAMEWORK

- Light and Strong steel construction framework for easy installation

### FRONT FRAME

- Made of galvanized box profile

### DOCK LEVELER PLATFORM (Optional)

- Steel bottom pit framework in case of dock leveler usage
- Feet with height adjustable

### Inner View



### DOCK HOUSE DIMENSIONS

- Production at required sizes



# DOCK TUNNEL

*Special solutions  
to “special” needs...*



## FRONT PVC CURTAINS (Optional)

- Braided PVC curtains with 3 mm thickness

## FRONT PVC FIXATION LATHS

- Made of anodized extruded aluminum

## SIDE CURTAIN

- European sourced PVC tarpaulin, 680 gr/m<sup>2</sup>

## TOP AND BOTTOM JUNCTIONS

- Ensures strong fixation against wind load



## RAIN/WATER DRAINING SLOT (Optional)

## REFLECTOR (Optional)

- Reflector support to ease vehicle approaching


## CROSSED ARM SYSTEM

- Movable, crossed shock absorber arms that also ensures parallel movements of both sides

## MOVING SYSTEM

- Steel wheel mechanism that slides on a track (with a wind hook)
- Prevents friction, helps to easy opening-closing

## TUNNEL OPENING-CLOSING MOTION

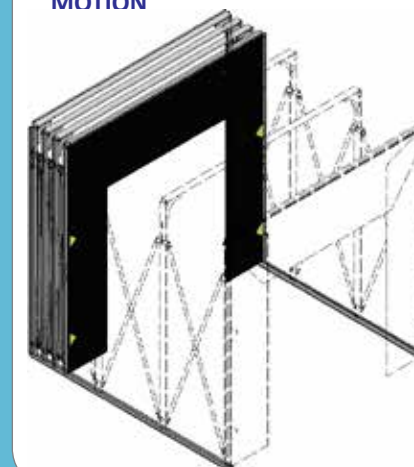

## Tarpaulin and PVC Curtain Colours

**STANDARD**- Black

\* Please refer to sales team for other colors

## Dock Tunnel Dimensions

Production at required sizes



ISTANBUL HEAD OFFICE & FACTORY



ANKARA BRANCH



IZMIR BRANCH



ITALY GOXU S.R.L.

## Continual Customer Satisfaction Continual Quality



For information